

AC Current Transducer with Display



Shenzhen Sensor Electronic
Technology Co.,Ltd

CE-DJ12-359MUI-0.5

Output function: display+ analog+relay

Analog output: 4-20mA; Power Supply: 220V (AC/DC);

Case Style: MU1; Accuracy: 0.5

Features

High cost performance, good stability, User can easily set the input threshold for output switching value, return difference and delay time to deny input action after a switching value output acted as your requirement


Specifications

Operating temperature:	-5°C ~ +50°C;
Response time:	<320mS.
Displayed digit capacity:	4 digits.
Maximum display:	9999.
Distinguish ability: Current:	0.001A (measuring range \geq 1A).
Measuring range:	AV Current: optional between 0A and 5A.
Load:	< 300 Ω
Switching value output:	one group of terminals, capacity: 5A 250V.
Power supply:	220V(AC/DC)
Power consumption	\leq 3.5VA.
Range of input frequency:	40Hz - 200Hz.
Isolation voltage:	DC2KV/min.1mA
Isolation resistance:	\geq 100M Ω

Case Style & Mounting Dimensions



Connections Diagrams

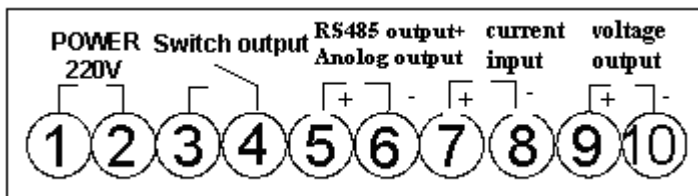

Notice

- The size of window must be fit for the conducting wire to pass through.
- If there is a meter is used to test the output of the transducer , please make sure the accuracy of the meter is higher than the transducer.