

# DC Voltage Transducer with Display



Shenzhen Sensor Electronic  
Technology Co.,Ltd

## CE-DU12-359MUI-0.5

**Output function: display+ analog+relay**

**Analog output: 4-20mA; Power Supply: 220V (AC/DC);**

**Case Style: MU1; Accuracy: 0.5**

### Features

High cost performance, good stability, User can easily set the input threshold for output switching value, return difference and delay time to deny input action after a switching value output acted as your requirement


### Specifications

Operating temperature:	-5°C ~ +50°C;
Response time:	<320mS.
Displayed digit capacity:	4 digits.
Maximum display:	9999.
Distinguish ability: Current:	0.001A (measuring range $\geq$ 1A).
Measuring range:	0-600V DC
Load:	< 300 $\Omega$
Switching value output:	one group of terminals, capacity: 5A 250V.
Power consumption	$\leq$ 3.5VA.
Isolation voltage:	DC2.5KV/min.1mA
Isolation resistance:	$\geq$ 100M $\Omega$

### Case Style & Mounting Dimensions



### Connections Diagrams

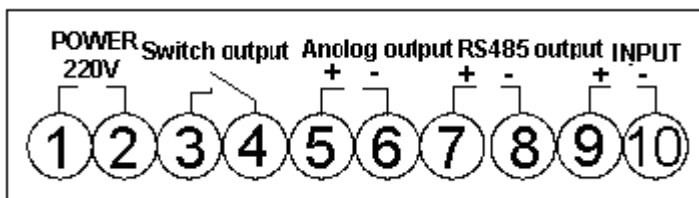

### Notice

- If there is a meter is used to test the output of the transducer , please make sure the accuracy of the meter is higher than the transducer.