

Hall Effect AC Current Transducer



Shenzhen Sensor Electronic Technology Co.,Ltd

CE-IJ04-26C5-1.0

Output: 0-50mA/100mA/150mA/200mA; Power supply: $\pm 15V$;

Window: 150*40mm; Case Style: C5; Accuracy: 1.0

Features

High isolation, small size, light in weight, less power consumption, window structure, no insertion loss

Specifications

Operating temperature: $-10\sim 80^{\circ}C$

Measuring range: 0-300~6800A AC

Temperature drift: 0.025% / $^{\circ}C$

Isolation : 3KVRMS/50Hz/1Min

Current consumption: $\pm 25mA$


Response time: 10 μ S

Overload: 20 times of the maximum value of measuring range


Case Style & Mounting Dimensions



L*W*H: 230*25*120mm

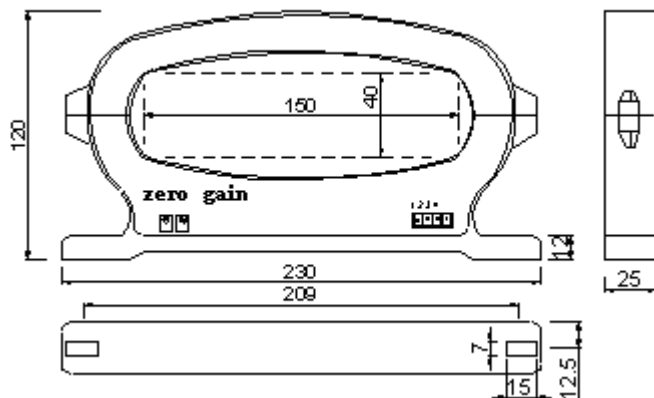

Connections Diagrams

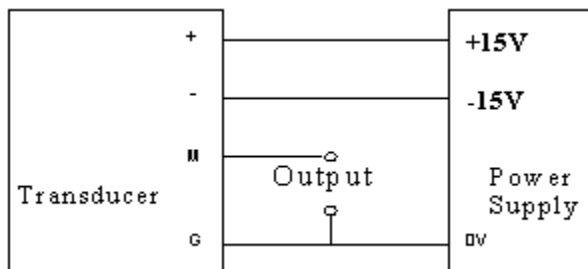

+: Positive power supply

-: Negative power supply

M: Signal output

G: Ground

Notice

- The best accuracy can be achieved when the window is fully filled with bus-bar(current carrying conductor)
- The in-phase output can be obtained when the direction of current of carrying conductor is the same as the direction of arrow marked on the transducer case.