

2-elements Standard Signal Distributor



Shenzhen Sensor Electronic Technology Co.,Ltd

CE-IZ28-34MS3-0.5

**Output: 0-5V DC; Power supply: 24VDC;
Aperture: none; Case Style: MS3; Accuracy: 0.5**

Features

High isolation, low drift, small size, terminal input, din rail mounting


Specifications

Operating temperature: -10~50°C
Rated input: 4-20mA DC
Accuracy: Class 0.5
Temperature drift: 300 ppm/°C
Isolation voltage: 2500 V DC
Load capability: ≤3mA
Response time: ≤150mS
Overload: 2 times of rated input, 10 times/sec
Test condition: power supply 24VDC, room temperature: 25°C


Case Style & Mounting Dimensions



83*36*76mm

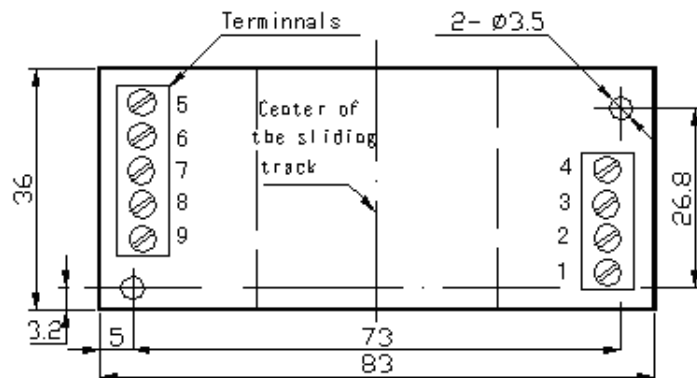

Connections Diagrams

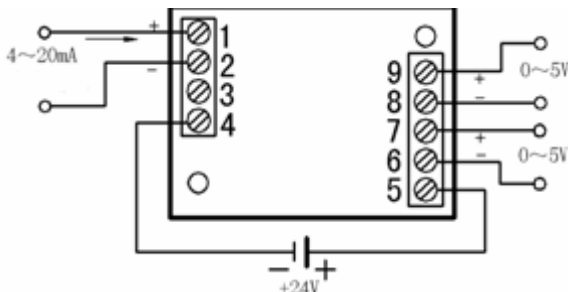

Terminal 1: 4-20mA signal input +
Terminal 2: 4-20mA signal input -
Terminal 4: 24VDC, negative
Terminal 5: 24VDC, positive
Terminal 6: output 1-
Terminal 7: output 1+
Terminal 8: output 2-
Terminal 9: output 2+

Notice

- a) All connections of the positive and negative polarities must be correct.
- b) The standard signal distributors should be used only in environments without conductive dust, corrosive or explosive gases.
- c) Please take additional and reasonable means for lightning protection, especially when the input and output wires of the standard signal isolator are exposed outdoors.